Branding Package

1330 Chestnut St. Philadelphia, PA 19107











workscope

sign#	description	Sq. Ft.	quantity	weight	electrical	notes
1	Illum. Trimless Channel Letters	22 Sq Ft	1	140 Lbs	3.0A	
2	Illum. Cabinet with Edgelit Push Through Acrylic	29 Sq Ft	1	120 Lbs	3.0A	
3	Face Replacement with Push Through Acrylic	27 Sq Ft	1	66 Lbs	3.0A	
4						
5						
6						
7						

Sign #1 - S1



Sign #3 - S3

ARCADE

ode:

NTE 2 square feet per linear foot of ground floor frontage; max 100 SF per sign with no limit on the number of signs.

document appropriete date:	roval	
approved	approved as noted	not approved


revisions

rev #	date	by:	description
1	X/XX/XX	-	-
2	10.11.24	EY	Revised channel letters
3	10.24.24	DH	Updated Technical Details
4			
5			
6			
7			
8			



Proposed North Elevation - Anamo Design Intent Scale: NTS


ARGADE

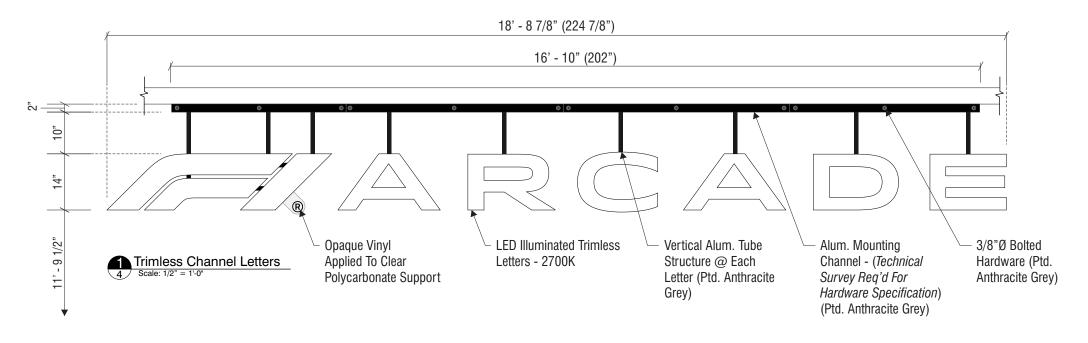




Proposed Illuminated Cabinet - Anamo Design Intent

S1

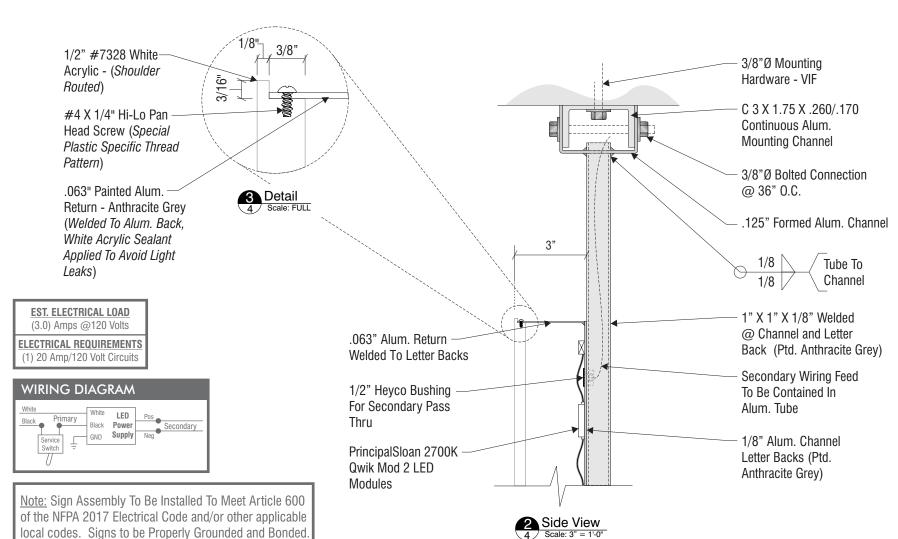

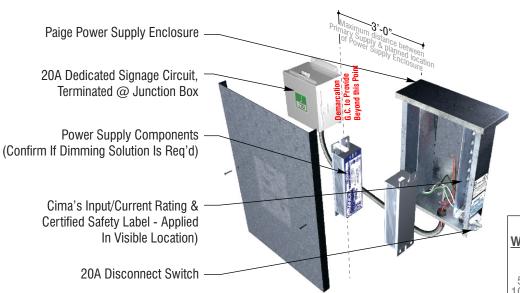

Low Voltage Wire Gauge Chart 0'-15' - 18awg 15'-50' - 14awg 50'-100' - 12awg 100'-150' - 10awg

Remote Enclosure - Detail Scale: NTS



Anthracite Grey RAL Color System - RAL 7016 Matthews Paint - MP 2530

White #7328 White Acrylic Substrate

STANDARD QTEMP



CUSTOM Custom Reface




39458 R3







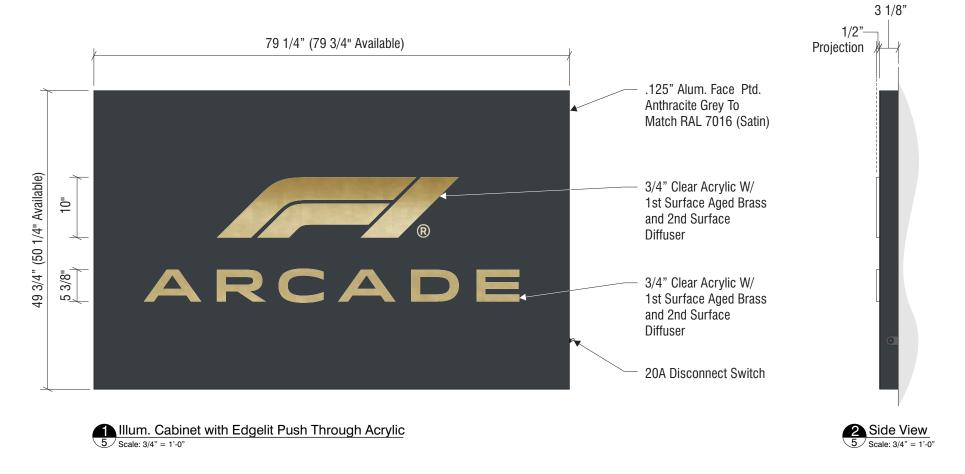

ARCADE

Proposed Illuminated Cabinet - Anamo Design Intent





Push Thru Acrylic W/ Opaque Face

S2

Aged Brass W/ Clear Coat (Satin)



Night Illumination Reference - 2700K LED Temperature



STANDARD QTEMP






39458 R3


Electrical Note: Sign Is Self Contained. Confirm 120V Electrical @ Sign

Location


EST. ELECTRICAL LOAD (3.0) Amps @120 Volts **ELECTRICAL REQUIREMENTS** (1) 20 Amp/120 Volt Circuits



Note: Sign Assembly To Be Installed To Meet Article 600 of the NFPA 2017 Electrical Code and/or other applicable local codes. Signs to be Properly Grounded and Bonded.

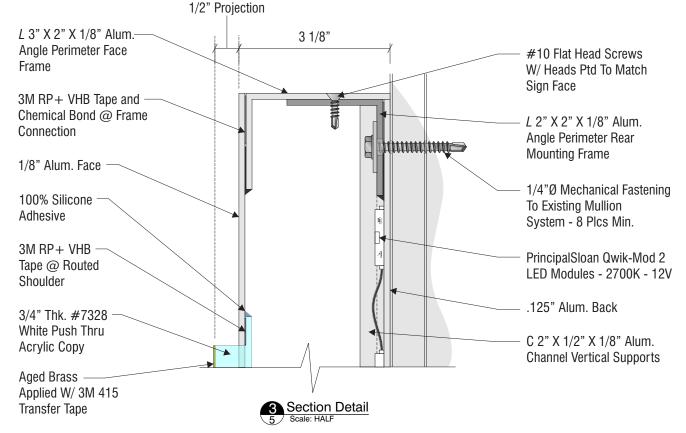



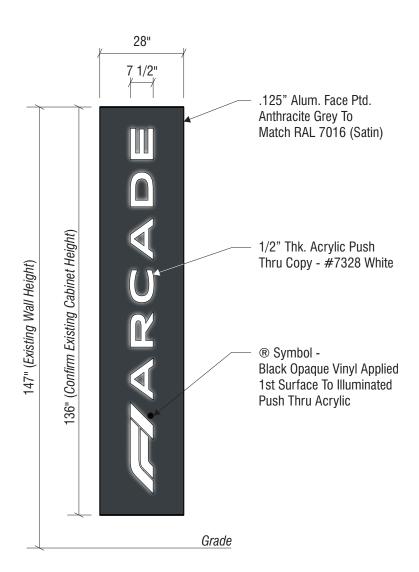

1/4" Projection VIF **Existing** Sign – Cabinet #10 Flat Head Screws W/ Heads Ptd To Match Sign Face .125" Alum. Sign Face 100% Silicone Adhesive 3M RP+ VHB Tape @ Routed Shoulder 1/2" Thk. #7328 ~ White Push Thru Acrylic Copy Section Detail

Scale: HALF

Proposed Reface of Existing Illuminated Cabinet


LED Illumination Note: Technical Survey Req'd To Confirm Existing **Cabinet Construction and Internal** Condition. Confirm If Existing Illumination is Usable and Confirm Color Temperature.



Existing Condition



Push Thru Acrylic Reference




STANDARD QTEMP











Note: Sign Assembly To Be Installed To Meet Article 600 of the NFPA 2017 Electrical Code and/or other applicable local codes. Signs to be Properly Grounded and Bonded. **Electrical Note:** Confirm If Existing Wall Sign Is Self Contained or If Power Supplies Are Remote Mounted.

